


## DIMENZIJE – TEHNIČNI LIST

### HIDRAVLIČNA DVIŽNA POTEZNICA – 50/30min.480 fi 22/22

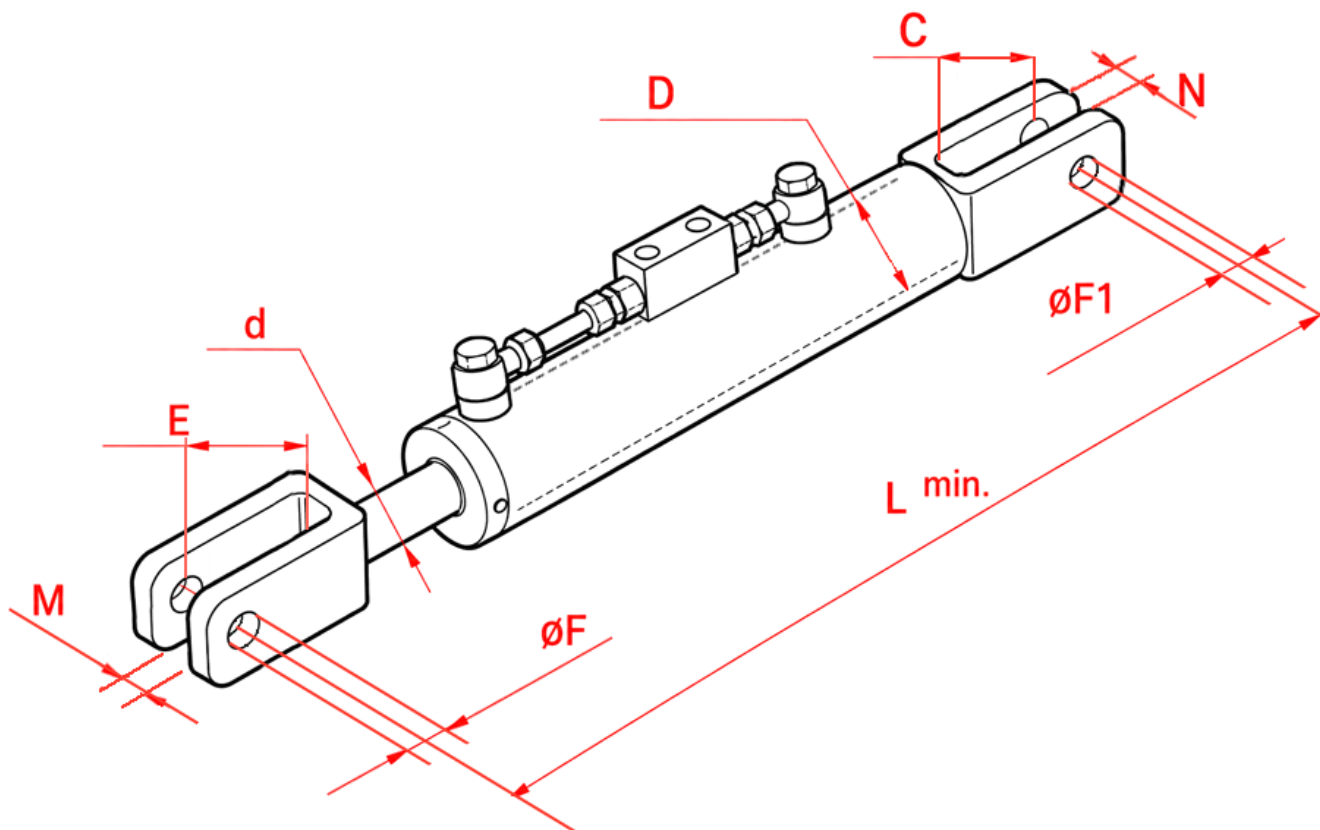

|                                                              |                     |
|--------------------------------------------------------------|---------------------|
| Notranja širina vilic "N":                                   | 38 mm               |
| Notranja širina vilic "M":                                   | 26 mm               |
| Razdalja med dnom cilindra in središčem luknje "C":          | 59 mm               |
| Razdalja med notranjo stranjo vilic in središčem luknje "E": | 98 mm               |
| Premjer batnice "d":                                         | 30 mm               |
| Maksimalni tlak:                                             | 250 bar             |
| Blok ventil:                                                 | da                  |
| Teža izdelka:                                                | 7,43 kg             |
| Notranji premer cilindra "D":                                | 50 mm               |
| Sila raztegovanja cilindra (pri 180 bar):                    | 3,53 ton            |
| Sila krčenja cilindra (pri 180 bar):                         | 2,26 ton            |
| Premjer luknje na batnici "F":                               | 22 mm               |
| Minimalna dolžina "Lmin":                                    | 480 mm              |
| Premjer luknje na cilindru "F1":                             | 22 mm               |
| Hod cilindra:                                                | 185 mm              |
| Zaščita:                                                     | barvan (barva črna) |

| Šifra | Znamka           | Model       |
|-------|------------------|-------------|
| 11663 | FIAT-NEW HOLLAND | TK compatto |

